


- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

# E95 Class, Series H

MPN

AEH-AR9592-NI

UPC



PRODUCT PAGE



@ AIRETOS.com

EVALUATION / RFQ



Request Now

SAMPLES




@ OxfordTEC

## 300Mbps Two Chain, Dual-Band 802.11abgn WLAN – Industrial Grade, Half Size MiniPCI Express Module


E95H based on QUALCOMM ATHEROS Reference Design XB116 (Peacock)

### DATASHEET



B	B	A	2	3	11 weeks
TECHPOINT	LIFESPOT	VAROD	VERTICALS	DCO	ELT

\* Page 2 for key legend. Commercial data refresh: May 2018

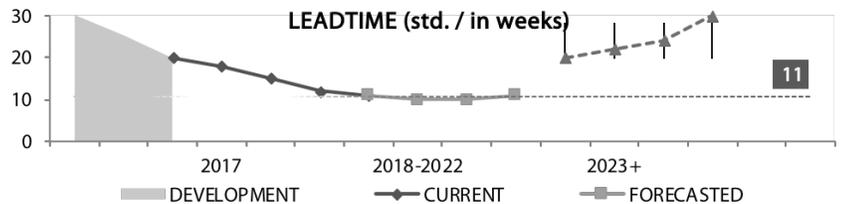

FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA AIRETOS.COM OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## Revision History

Releases	Date	Notes	Prepared	Approved
Version 0.9	2018/05/25	Standard Version Specification - Draft	A Stamatis	LTu

### \* Commercial Key Legend

Indicators that assess the specific product for its position in the technology curve and the supply chain responsiveness it enjoys. They combine an inner-outer view: both from outside factors and from internal corporate and production support.

- MOI [Market Orientation Index]** A value calculated from the grading of the factors below. Used as a rule-of-thumb to aid design-in and procurement evaluation. MOI depicts the present product affinity to Innovation (I), Customer Empathy (C) and Price Focus (P).
- TECHPOINT** The position of the product within the specific technology-innovation curve for its class. VALUES: Advanced (A), Barring (B), Common (C), Dissolving (D).
- LIFESPOT** Estimated lifespan indicator. VALUES: Agonist (A), Bold (B), Current (C), Distressed (D); the earlier the letter the earlier the position in the specific product lifecycle.
- VAROD [Variants On-Demand]** An indicator of the depth and difficulties On-Demand product variations can reach and encounter. VALUES: Auxiliary (A), Basic (B), Core (C), Deep (D).
- VERTICALS** It is an index of the spread of product applications in different vertical markets. VALUES: 1 to 4; the more the target markets the higher the number, the less the product specificity to markets.
- DCO [Design Cost Orientation]** Commodity index related to the cost point for the product’s design conception. VALUES: 1 to 4; the higher the number the more cost aware is the core design.
- ELT [Effective Lead Time]** Adjusted lead-time in weeks. This is a compound value based on the timeframe for the fulfillment of the 90% of unscheduled orders received accounting also for the industrial lead-time and internal inventory buffering. VALUE: number of ELT weeks.



FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA AIRETOS.COM OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

**450MBPS TWO CHAIN, DUAL-BAND, IEEE 802.11ABGN WLAN –EXTENDED GRADE, HALF SIZE MINIPCI EXPRESS MODULE**

<b><u>REVISION HISTORY</u></b>	<b><u>2</u></b>
<b><u>* COMMERCIAL KEY LEGEND</u></b>	<b><u>2</u></b>
<b><u>DESCRIPTION</u></b>	<b><u>4</u></b>
<b><u>TOP FEATURES</u></b>	<b><u>4</u></b>
<b><u>SPECIFICATIONS</u></b>	<b><u>5</u></b>
<b><u>RATINGS / CHARACTERISTICS</u></b>	<b><u>7</u></b>
<b><u>MECHANICAL DRAWING</u></b>	<b><u>8</u></b>
<b><u>CONNECTOR PIN-OUT DEFINITIONS</u></b>	<b><u>9</u></b>
<b><u>BLOCK DIAGRAM</u></b>	<b><u>10</u></b>
<b><u>ENVIRONMENTAL PERFORMANCE QUALIFICATION</u></b>	<b><u>10</u></b>
<b><u>STANDARD DOMAIN CODE &amp; IDENTIFICATION</u></b>	<b><u>11</u></b>
<b><u>PRODUCT LABEL</u></b>	<b><u>11</u></b>
<b><u>ESD PROCESSES</u></b>	<b><u>11</u></b>
<b><u>STANDARD PACKAGING, STORAGE &amp; SHIPPING</u></b>	<b><u>12</u></b>
<b><u>ORDERING INFORMATION</u></b>	<b><u>13</u></b>
<b><u>NOTICES</u></b>	<b><u>14</u></b>
<b><u>AIRETOS™ PROFILE</u></b>	<b><u>15</u></b>



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 1. Description

**Dual Band 2x2 – True Industrial Grade:** The AEH-AR9592 IEEE 802.11 a/b/g/n PCI-E WLAN is a highly integrated wireless, true full industrial grade module for outdoor, enterprise and industrial level applications. Advance firmware features in the E95H Series allow for 5/10/20/40MHz channel bandwidth, Enhanced Transmission Power Accuracy, High-resolution Spectral Analysis and so make this device the one of choice for modern industrial designs. Connect one or two antennas, as per your design specifications.

**Enterprise Features:** 4.9GHz frequency band support / narrow 5/10MHz channelization, Dynamic Frequency Selection (DFS), Enhanced small packet performance, Spatial Multiplexing, cyclic-delay diversity (CDD), low-density parity check (LDPC), maximal ratio combining (MRC), space time block code (STBC), smart antenna diversity, loopback mode for FIPS security certification.

**Enhancements over AR93xx:** Dynamic Frequency Selection (DFS), Spectral Analysis, Support for Smart Antenna, Transmission Beamforming (TxBF), loopback mode for FIPS security certification.

**Higher Output – Better Links:** E95H series adopt XSPAN with SST3 and Multiple In, Multiple Out (MIMO) technology with enhanced output aggregate power at 21dBm and Tx Beamforming. Thus it provides larger coverage and increased specific link throughput.

## 2. Top Features



True Industrial Grade, for high humidity and under severe weather operation (-40 ~ +85°C)

Dual Band (DB), 2.4Ghz + 5 Ghz wireless connection up to 300Mbps

Two antenna connectors, for MIMO 2Tx2R (2 Transmit & 2 Receive) technology

Enhanced Tx Power Accuracy with up to 21dBm aggregate output

Transmission Beamforming (TxBF)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

### 3. Specifications

SOLUTION DESIGN	<b>Chipset</b>	Qualcomm-Atheros AR9592-AR1B
	<b>Standard</b>	IEEE 802.11 a/b/g/n Wi-Fi
	<b>Industrial Reference</b>	Based on Qualcomm Atheros reference design XB116
APPEARANCE	<b>Communications Interface</b>	Mini PCIE format, PCI Express Standard 1.1 host I/O
	<b>Form Factor</b>	Mini PCIE format, standard mPCIe dimensions – Half size card
ANTENNA	<b>Configuration</b>	Two Streams (2 chains), 2x2, 2 Connectors, MIMO
	<b>Type</b>	Two I-PEX / U.FL connectors
WIRELESS PARAMETERS	<b>Frequency Band</b>	2.4 GHz ISM Bands 2.412-2.472 GHz, 2.484 GHz 4.9 GHz (optional band support for Japan only) 5.15-5.25 GHz (FCC UNII-low band) for US/Canada, Japan and Europe 5.25-5.35 GHz (FCC UNII-middle band) for US/Canada and Europe 5.47-5.725 GHz for Europe 5.725-5.825 GHz (FCC UNII-high band) for US/Canada
	<b>Data Transfer Rates</b>	WLAN 2.4GHz: 11n: Up to 300Mbps(dynamic) 11g: Up to 54Mbps(dynamic) 11b: Up to 11Mbps(dynamic) WLAN 5GHz: 11n: Up to 300Mbps(dynamic) 11a: Up to 54Mbps(dynamic)
	<b>Media Access Control</b>	CSMA/CA with ACK
	<b>Channel</b>	2.4GHz: 1-13 (14 only for Japan) 5GHz: 36-48 149-165
	<b>Channel Spacing</b>	5MHz
	<b>Spreading / Modulation</b>	802.11a/g/n: OFDM: BPSK, QPSK, 16-QAM, 64-QAM - DSSS: DBPSK, DQPSK, CCK 802.11b: CCK(11, 5.5Mbps), DQPSK(2Mbps), BPSK(1Mbps)
	<b>RF Output Power (Estimate)</b>	802.11a: Typical 11 dBm at 54M / 15dBm at 6M 802.11b: Typical 17dBm +/- 1.5 dBm 802.11g: Typical 16 dBm at 54M / 17dBm at 6M +/- 1.5dBm 802.11n 5G HT20 : Typical 10 dBm at MCS15 / 15dBm at MCS0 +/- 2dBm 802.11n 5G HT40 : Typical 9 dBm at MCS15 / 14dBm at MCS0 +/- 2dBm 802.11n 2.4G HT20: Typical 14 dBm at MCS15 / 16dBm at MCS0 +/- 2dBm 802.11n 2.4G HT40: Typical 13 dBm at MCS15 / 15dBm at MCS0 +/- 2dBm The two chain combined output power equals to single chain power plus 2dB (2Tx = 1Tx + 2dB)

FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA AIRETOS.COM OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

	<b>RF Receive Sensitivity (Typical)</b>	802.11a: 6M less than 82dBm, 54M less than 65 dBm 802.11b: 1M less than 80dBm, 11M less than 76 dBm 802.11g: 6M less than 82dBm, 54M less than 65 dBm
		802.11n 2.4G HT20: MCS7 less than 64 dBm / MCS0 less than 82dBm / MCS8 less than 82dBm/ MCS15 less than 64dBm
		802.11n 2.4G HT40: MCS7 less then 61 dBm / MCS0 less than 79dBm / MCS8 less than 79dBm / MCS15 less than 61dBm
		802.11n 5G HT20: MCS7 less then 64 dBm / MCS0 less than 84dBm /MCS8 less than 84dBm / MCS15 less than 64dBm
		802.11n 5G HT40: MCS7 less then 61 dBm/ MCS0 less than 79dBm /MCS8 less than 79dBm / MCS15 less than 61dBm
	<b>Operating Range</b>	Open Space: ~300 m; Indoor: ~100 m (The transmission speed may vary according to the environment)
	<b>Wireless Security</b>	WEP 64-bit and 128-bit encryption WPA (Wi-Fi Protected Access) WPA2 (Wi-Fi Protected Access)
<b>WORKING MODES</b>	Infrastructure, Client, Bridge, Ad-hoc	
<b>SAFETY, EMISSION &amp; REGULATORY</b>	Compliant with FCC, CE and IC. Compliant with RoHS.	
<b>PROTOCOLS</b>	<b>IEEE WLAN Network</b>	802.11n , 802.11g, 802.11b, 802.11a, 802.11d, 802.11e, 802.11j and 802.11i
	<b>Other Standards</b>	
	<b>Industry Standards</b>	
<b>HOST SYSTEM REQUIREMENTS</b>	<b>Operating System</b>	Windows (32 & 64 bits) XP/Vista/7/8/10, OSX, Linux
<b>ENVIRONMENT</b>	<b>Operating Temperature</b>	-40° ~ +85° Celsius
	<b>Storage Temperature</b>	-50° ~ +90° Celsius
	<b>Operating Humidity</b>	10%~90% non-condensing
	<b>Storage Humidity</b>	5%~90% non-condensing
<b>ELECTRICAL</b>	<b>I/O Voltage</b>	3.3V +/-10%
	<b>Power Consumption</b>	Transmit Packet Max (estimate) HT20: 715 mA Receiver Packet Max (estimate) HT40: 129 mA
<b>MECHANICAL</b>	<b>Dimensions</b>	29.85mm x 26.65mm x 3.15mm (with shielding)

FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA AIRETOS.COM OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

	<b>Weight</b>	3.1 g
<b>PACKAGING</b>	<b>Packing style</b>	ESD Sleeves in Carton Box Package (optional: open plastic tray modality)
	<b>Package Contents</b>	AEH-AR9592 IEEE 802.11 a/b/g/n mPCI-E modules

## 4. Ratings / Characteristics

### 4-1. Absolute Maximum Ratings

Symbol	Parameter	Max. Rating	Unit
V <sub>dd33</sub>	Maximum I/O supply voltage	3.63	V
RFin	Maximum RF input (reference to 50 Ω)	+10	dBm
T <sub>store</sub>	Storage temperature	-50~+90	°C

### 4-2. Recommended Operating Conditions

Symbol	Parameter	Rating	Unit
V <sub>dd33</sub>	I/O voltage	2.97~3.63	V


### 4-3. GPIO Interface Characteristics

Signal Name (To chip GPIO PIN)	Mini PCI-E PIN	Type	Driver	PU/DP Resistance
WLAN_LED	44	O	24 mA (Max)	None-PU (PU resistor function option available)
WLAN_DISABLE	20	I	_	None-PU (PU resistor function option available)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 5. Mechanical Drawing

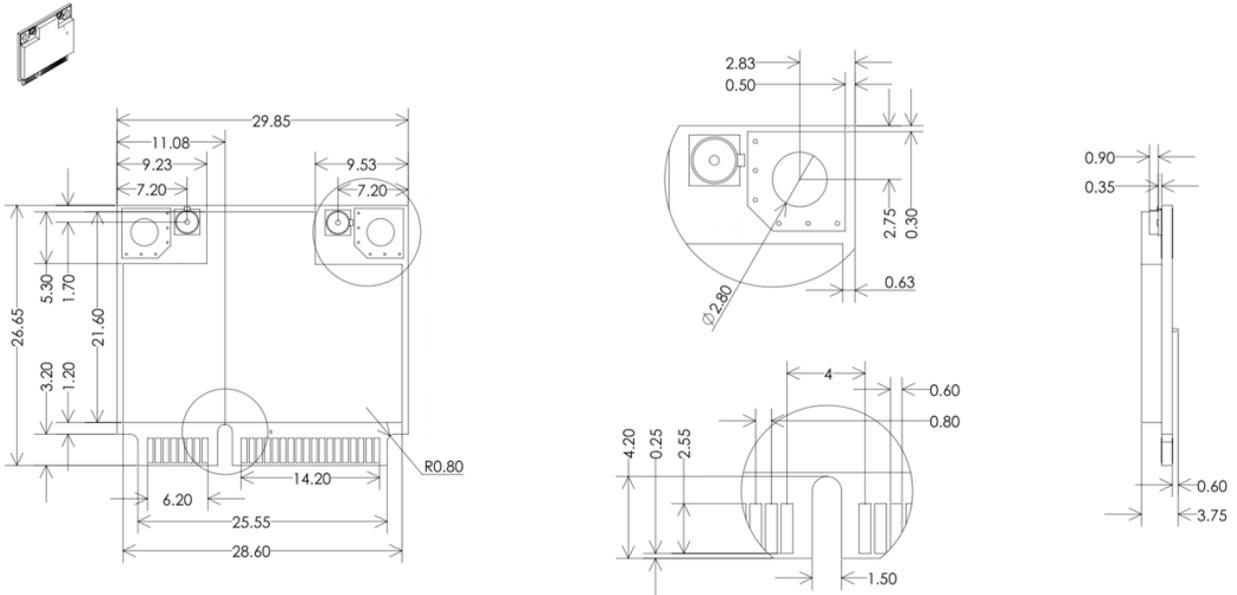

FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA AIRETOS.COM OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)




- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 6. Connector Pin-out Definitions

Pin No.	Definition	Basic Description	Type
2	+3.3V	3.3V power supply	Power
7	CLKREQ_L	Reference clock request.	Output
11	REFCLK-	Differential reference clock	Input
13	REFCLK+	Differential reference clock	Input
20	W_DISABLE_L	WLAN disable control. Low disables WLAN. Module P.U	Input
22	PERST_L	PCI express fundamental reset	Input
23	PERn0	Differential transmit	Output
25	PERp0	Differential transmit	Output
31	PETn0	Differential receive	Input
33	PETp0	Differential receive	Input
44	LED_WLAN_L	Active low signal. The signal is used to provide WLAN status indicators via LED.	Output
52	+3.3V	3.3V power supply	Power

Interface type	Bus Signaling	Standard
NGFF Edge	PCIe	PCI-SIG v1.1

\*Physical Layer Form Factor follows standard PCIe definitions. Graphic representation below.

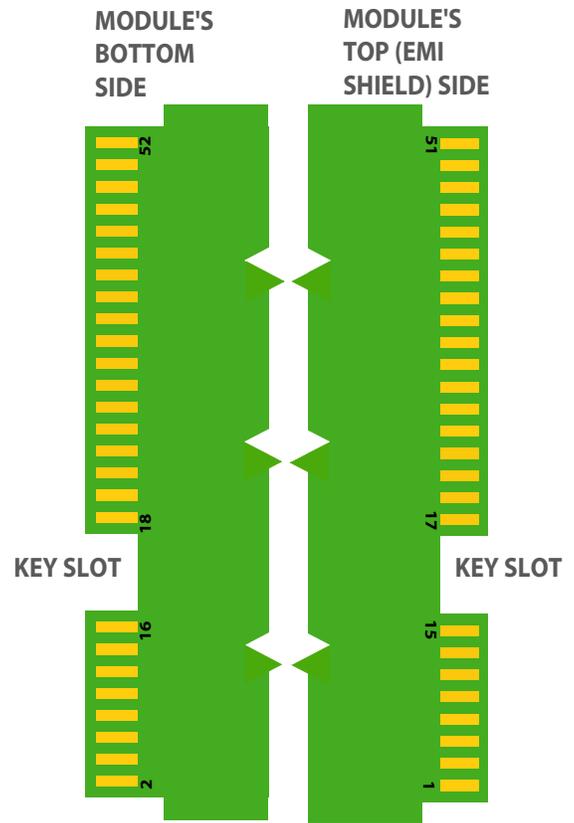


\*Pin/Contact Numbers not appearing in the above table are either reserved or unused.



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 7. Block Diagram

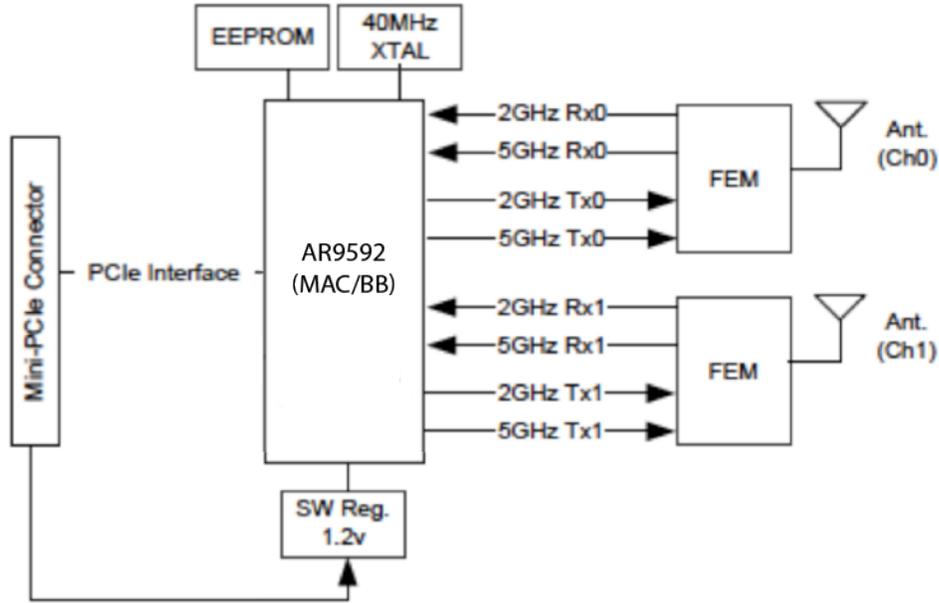

## 8. Environmental Performance Qualification

At the time of writing this document, throughput test at controlled thermal conditions are to be scheduled. Any related enquiries can be addressed to your sales / account manager.



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 9. Standard Domain Code & Identification

The Regulatory Domain pre-programmed as standard is 0x6C [wide open world mode].  
Other regulatory domain codes can be pre-programmed on-request at production batch level.  
Implemented as standard are identifiers based on Qualcomm Atheros XB116 reference design:

	Vendor ID (VID)	Subsystem ID (SVID)	Vendor ID (DID)	Device ID (DID)	Subsystem ID (SSID)
<b>STANDARD WLAN</b>	0x168C	0x168C	0x33		0x3123


## 10. Product Label

### 10-1. Front (Shield) Side Regulatory Label

Standard label is shown here with all applicable marking including any regulatory domain identifiers: FCC (USA), ETSI (Europe), EU Safety & Environmental.

Wireless LAN NIC MAC ID label (human legible and barcode).

Serial Number label (human legible and barcode) plus Variant Number.

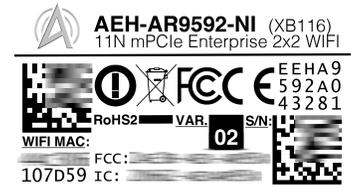

### 10-2. On-Demand Labeling

Labels can be tailored to report customer's part number and regulatory compliance following Qualcomm Atheros XB116 reference design certifications for any of the countries and domains required.

## 11. ESD Processes

See Notices appended.



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 12. Standard Packaging, Storage & Shipping

ESD Sleeve, Inner Box & Outer Carton level standard packing schematic \* :



	Module in ESD Sleeve	Inner Box Kit (K)	Master Carton (M)
CONTENT (UNITS)	1	60	960
INVENTORY SKU	AEH-AR9592-NI	AEH-AR9592-NI-K	AEH-AR9592-NI-M
OUTER DIMENSIONS	70 x 60 x 3.5 mm	204 x 165 x 65 mm	430 x 350 x 285 mm
GROSS WEIGHT	3.2 gr	250 gr	5120 gr
PICK & PACK METHOD	Padded envelope or carton box depending on quantity. Padded & separated.	In outer carton packaging.	As-is.
PACKAGING COMPLIANCE **	ANSI/ESD S20.20, IEC 61340-5-1, RoHS2	RoHS2	RoHS2
HTS CODE (HS)	8517.62	8517.62	8517.62
NAFTA / ECCN	On request	On request	On request


\* Packaging modality and artwork can be designed as per customer’s requirements.

\*\* The Packaging modality and the selection of its materials is made with environmental responsibility and commitment to resource preservation. Please reuse and recycle where possible.

The AEH-AR9592-NI constitutes a sensitive electronic device and caution is required when handling it. ESD handling, shipment and storage notices apply:



**DO NOT OPEN OR HANDLE EXCEPT AT A STATIC-FREE WORKSTATION**



**DO NOT SHIP OR STORE NEAR STRONG ELECTROSTATIC, ELECTROMAGNETIC OR RADIOACTIVE FIELDS**



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 13. Ordering Information

Public variants, their differential characteristics and ordering information:

	Ordering P/N	Variant IDs	Description
<b>STANDARD PRODUCT</b>	AEH-AR9592-NI	- / B / 02	<ul style="list-style-type: none"> <li>- AIRETOS E95 Class, Series H</li> <li>- QCA-AR9592 AR1B Chipset</li> <li>- Commercial Industrial Grade</li> <li>- Standard product</li> <li>- Standard packaging</li> </ul>



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## 14. NOTICES

**STORAGE:** The product shall be stored and the package shall remain closed according to storage environmental conditions noted within this datasheet. - The product shall be stored in non-corrosive gas (Cl<sub>2</sub>, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>x</sub>, etc.). - No excess mechanical shock shall be applied including, but not limited to, sticking the packing materials by sharp object and dropping the product, in order to avoid damaging the packing materials.

**SHELF LIFE:** Products left more than two years after reception need to have their specifications confirmed prior to use.

**HANDLING:** Care in handling or transporting products is required as excessive stress or mechanical shock may break products. - Cracks or damages on products' terminals may lead to changes in their characteristics. Products are not to be touched with bare hands as this may result in electrostatic damage. - Application of static electricity or overvoltage may cause defect in the product or deterioration of its reliability, and caution must be taken against exposure to any static electricity generated by electrified items such as workbenches, soldering irons, tools, carrying containers, etc.

**LAND PATTERN & DIMENSIONS:** All ground terminals should be connected to the ground patterns. Furthermore, the ground pattern should be provided between IN and OUT terminals. Please refer to the specifications for standard land dimensions.

**MECHANICAL PLACEMENT:** When mounting products connected to other components, products may be stressed and broken by uneven forces. To prevent such damages, compliance with specifications for the tools and interfaces being used is required.

**CLEANING:** As this Product is Moisture Sensitive, no cleaning is permitted.

**OPERATIONAL ENVIRONMENTAL CONDITIONS:** Products are designed to work as part of electronic compositions under normal environmental conditions (ambient temperature, humidity and pressure). Operation under the following circumstances may damage the products and leakage of electricity and abnormal temperature may occur:

- In an atmosphere containing corrosive gasses (Cl<sub>2</sub>, NH<sub>3</sub>, SO<sub>x</sub>, NO<sub>x</sub>) or combustible and volatile gases - Dusty places - Places of direct sunlight
- Water splashing places - Humid places where water condenses - Freezing places - etc.

In the instance of potential operation in such environments, consult with AIRETOS before actual use. Application of static electricity or excessive voltage while assembling and measuring is discouraged as it might be a cause of degradation or destruction.

**INPUT POWER CAPACITY:** Products shall be used in the input power capacity specified in this datasheet. If components are to be used beyond the documented input power capacity range, prior consultation with AIRETOS is advised.

**LIMITATION OF APPLICATIONS:** The product is designed and manufactured for consumer application only and is not available for any application listed below which requires significantly high reliability for the prevention of defects that may directly cause damage to the third party's life, body or property.

- Aircraft equipment - Aerospace equipment - Undersea equipment - Power plant control equipment - Medical equipment - Transportation equipment (vehicles, trains, ships, etc.) - Traffic signal equipment - Disaster prevention / crime prevention equipment - Data-processing equipment - Application of similar complexity and/ or reliability requirements to the applications listed in the above.

If the product is to be used in equipment or electric circuit that requires high safety or reliability function / performances, sufficient reliability evaluation check for safety shall be performed prior to commercial shipment and consideration for the installation of a protective circuit at customer's design stage is strongly recommended. Please provide and appropriate fail-safe function on the customer's product to prevent any damages that may be caused by the abnormal function or the failure of our product.

**QUALITY CONTROL:** Testing and other quality control techniques are applied to the extent AIRETOS deems necessary. Unless mandated by government requirements, AIRETOS does not necessarily test all parameters of each product.

**LIFECYCLE:** Please note that AIRETOS may discontinue the manufacture of products, due to reasons such as end of supply of materials and/or components from our suppliers.

**CONFORMITY:** Please make sure that your product has been evaluated and confirmed against your specifications when the AIRETOS product is mounted to your product. Please conduct validation and verification of the products in actual condition of mounting and operating environment before commercial shipment of the equipment. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement. We consider it not appropriate to include other terms and conditions for transaction warranty in product specifications, drawings or other technical documents. Therefore, even if your original part of this product specification includes such terms and conditions as warranty clause, product liability clause, or intellectual property infringement liability clause, we are not able to accept such terms and conditions in this product specification unless they are based on the governmental regulation or what we have agreed otherwise in a separate contact. We would like to suggest that you propose to discuss them under negotiation of contract.

**DISCLAIMER:** Please note that the only warranty that AIRETOS (DBA part of the VoxMicro LTD Group) provides regarding the products is its conformance to the specifications provided herein. Accordingly, AIRETOS shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

AIRETOS HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. YOU AGREE TO INDEMNIFY AND DEFEND AIRETOS AND ITS AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF PRODUCTS.

AIRETOS's liability under this warranty shall be limited to products that are returned during the warranty period to the address designated by AIRETOS and that are determined by AIRETOS not to conform to such warranty. If AIRETOS elects to repair or replace such products, AIRETOS shall have reasonable time to repair such products or provide replacements. Repaired products shall be warranted for the remainder of the original warranty period. Replaced products shall be warranted for a new full warranty period.

For avoidance of doubt, AIRETOS shall not be liable for any defects that are caused by neglect, misuse or mistreatment by an entity other than AIRETOS including improper installation or testing, or for any products that have been altered or modified in any way by an entity other than AIRETOS. Moreover, AIRETOS shall not be liable for any defects that result from your or third party's design, specifications or instructions for such products.



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM

## AIRETOS™ PROFILE

5 Locations – 80% Direct Market Coverage – Affiliate Support



### Quality Functions at all Stages



### Behind the Scenes



OF REVENUE  
• INVESTED IN INNOVATION R&D



HANDS-ON IN  
• OEM/ODM WIRELESS MODULE MARKET



DECADES OF  
• CUMMILATIVE ENGINEERING EXPERIENCE



HUNDREDS OF  
• ROUTINE INDUSTRIAL CUSTOMERS



THOUSANDS OF  
• TUNING HOURS YEARLY



MILLIONS OF  
• INTERNAL AND EXTERNAL INVESTMENTS

World Distribution & Samples via OxfordTEC®

FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA [AIRETOS.COM](http://AIRETOS.COM) OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)



- APPLICATION ADVISORY
- PROACTIVE SUPPLY CHAIN
- ON-DEMAND CO-SPONSORING
- WORLD-CLASS QUALITY OEM



**FREE SHIPPING**

\*on orders above \$100



**CARD, CHECK OR P.O.**

NET Terms for trade & government



**30-DAY RETURNS**

peace of mind on all items



**WORLD SHIPPING**

\*also via your courier for account customers

FOR FURTHER INFORMATION, DEVELOPMENT SAMPLES, CUSTOMIZATION AND VOLUME PRICING CONTACT US VIA [AIRETOS.COM](http://AIRETOS.COM) OR VIA THE VOXMICRO GROUP WHOLESALERS - FOR CONTACTS SEE [WWW.VOXMICRO.TEL](http://WWW.VOXMICRO.TEL)

REGIONAL OFFICES IN: N. AMERICA/U.S.A. – EUROPE/U.K. – ASIA/HONG KONG-TAIWAN 台灣

